ACP 105 EU

5 BUTTON AUDIO CONTROL PANEL - FLEX55 AND EU

The ACP 105 EU is a configurable audio control panel that interfaces with DMP 128 Plus audio processors. It provides control of audio system functions such as source selection and preset or macro recall. Up to eight ACP Series control panels can be connected to one DMP Plus Series processor. Each panel can be used for independent control of a specific zone or an entire combined space. The ACP 105 EU features five customizable, soft-touch buttons that are backlit for easy operation in low-light environments. It can be configured easily using Extron DSP Configurator Software. For worldwide use, the ACP 105 EU is compatible with Flex55 modules, mounting kits, and enclosures, as well as EU junction boxes.

▶ Fully configurable button panel integrates easily with an Extron DMP 128 Plus Series audio DSP processor

▶ Five backlit, soft-touch buttons that can be customized using Extron's Custom Button Builder

▶ Two ACP ports allow for quick system expansion and upgrades

▶ Use a single button panel or combine up to eight button panels to accommodate a broad variety of system designs

▶ Simple yet elegant design blends well in any architectural environment

▶ Mounts in a single gang EU or Flex55 junction box

▶ Includes black and white faceplates

Extron

DESCRIPTION

The **ACP Series** of configurable audio control panels interface with the DMP 128 Plus audio processors to provide volume adjustment for mixing and zone control, plus preset or macro recall for room configuration. Up to eight ACP Series control panels can be installed around a meeting space and linked together. Each panel can be used for independent control of a specific zone or to adjust audio settings for the entire combined space. The ACP Series button panels are easy to configure using Extron DSP Configurator Software.
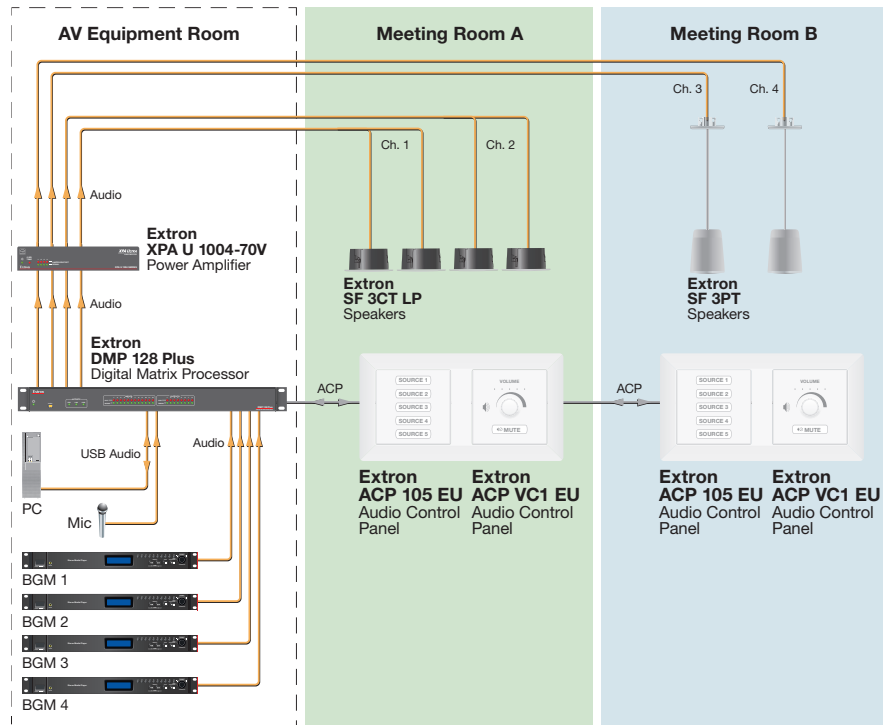
ACP Series audio control panels can be mounted in a lectern to provide easy access to mic volume, program volume, and source selection. Mounted on a wall, ACP panels provide an easy means of controlling individual and combined speaker zones in divisible meeting spaces. Since ACP panels are similar in physical appearance to many other Extron button panels, such as MediaLink Controllers, Network Button Panels, and eBus Panels, they can be used together throughout a facility, maintaining a consistent look and user experience. Buttons can be easily customized using Extron Button Label Generator software or the online Custom Button Builder tool.

SPECIFICATIONS

ACP CONTROL INTERFACE	
ACP control ports	(2) 3.5 mm captive screw connectors, 4 pole
ACP pin configuration	+V = +12 VDC; +S = + signal; -S = - signal; G = ground
Recommended cable type	Extron STP20-2/1000 or STP20-2P/1000 cable
SOFTWARE CONFIGURATION	
Software	Extron DSP Configurator
GENERAL	
Power	Power is supplied by an ACP enabled processor or optional power supply
ACP power consumption	1.5 watts, 12 VDC (device only)
Thermal dissipation	3.9 BTU/hr
Enclosure dimensions	
Plastic faceplate	3.2" H x 3.2" W x 0.4" D (8.1 cm x 8.1 cm x 1 cm)
Metal mounting plate	2.8" H x 2.8" W x 0.6" D (7.1 cm x 7.1 cm x 1.6 cm) (Fits the opening in a 1-gang EU wallplate)
Device	1.8" H x 1.8" W x 0.6" D (4.6 cm x 4.6 cm x 1.6 cm) (Depth excludes faceplate and buttons)
Device and captive screw	1.8" H x 1.8" W x 1" D (4.6 cm x 4.6 cm x 2.6 cm)
Product weight	0.2 lbs (0.1 kg)
Regulatory compliance	CE, c-UL, C-tick, FCC Class A, ICES, RoHS, UL, VCCI Class A, WEEE, Section 508 of the Rehabilitation Act (29 U.S.C. 964d)
Product warranty	3 years parts and labor

Model	Version Description	Part number
ACP 105 EU	EU and Flex55, Black and White, 5 Button	60-1860-31

For complete specifications, please go to www.extron.com
Specifications are subject to change without notice.

APPLICATION DIAGRAM

www.extron.com